

5–12NM Solar Marine Lantern

SL-C500



The SL-C500 is a completely self-contained 5–12NM Solar LED Marine Lantern designed for a range of low-maintenance applications.

The light boasts a large internal battery compartment, a SL-155 Series LED light-head and 4 premium-grade 10 watt solar modules mounted to collect sunlight at all angles.

The SL-C500 is moulded from UV-stabilised, virgin polyethylene, providing enormous impact and weather resistance, in addition to high visibility IALA colours.

The user-friendly, 2-piece design allows the lantern to be opened for convenient battery inspection or replacement whilst the base remains fixed to the supporting structure.

Advanced PC or IR Programming

Sealite's convenient PC Configuration Tool or IR programmer allows a host of features to be user set including;

- Multiple intensity settings
- 310 flash settings including custom character
- Automatic effective intensity adjustment
- Adjustable on/off lux levels
- Low battery threshold
- GPS synchronisation offset
- Alarm conditions

Optional GPS Synchronisation

The SL-C500 may be fitted with an optional GPS module for flash synchronisation.

Optional GSM Monitoring & Control System


The SL-C500 lanterns may also be fitted with a GSM Cell-Phone Monitoring and Control System – enabling users to access real-time diagnostics data and change lantern settings via cell-phone. The system can also be configured to send out alarm SMS text messages to designated cellular telephone numbers. Users can also have alarms and reports sent to designated email addresses.

Optional Type 1 or Type 3 AIS

The SL-C500 lanterns are available with a class-leading integrated, low-powered Type 1 or Type 3 AIS.

When fitted, the AIS is encapsulated within the body of the SL-155 to maintain the weatherproof integrity.

Note: With integrated AIS, the lanterns visible range may be reduced. Please check the Sealite Solar Calculator for performance characteristics.

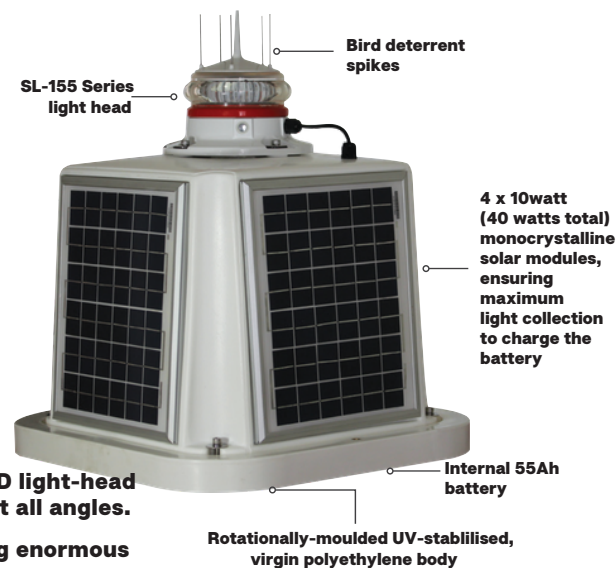

Reliable

- Up to 12NM visible range
- Multiple lens divergences for fixed or floating applications
- Complete unit – ready for immediate installation
- Impact & weather resistant polyethylene
- PC or IR Programmer for setup, diagnostic & testing






Technical Specifications*

SL-C500	
Light Characteristics	
Light Source	SL-155-2.5D/5D/10D lantern
Available Colours	Red, Green, White, Yellow
Typical Maximum Intensity (cd)*	Refer to Typical Maximum Intensity Table for SL-155 Series
Visible Range (NM)	Lanterns
Vertical Divergence (degrees)	AT @ 0.74: 5-12
Horizontal Output (degrees)	AT @ 0.85: 6.3-17.4
Available Flash Characteristics	360
Intensity Adjustments	Up to 310 including 256 IALA recommended, & 1 custom
LEDLife Expectancy(hours)	User adjustable
Electrical Characteristics	
Current Draw(mA)	Refer to Sealite Power Calculator
Power (W)	Refer to Sealite Power Calculator
Circuit Protection	Polarity protected
Nominal Voltage (VDC)	12
Autonomy (days)	>20 (14 hour darkness, 12.5% duty cycle)
TemperatureRange	-40 to 80°C
Solar Characteristics	
Solar Module Type	Monocrystalline
Output (watts)	40 (4 x 10watt)
Charging Regulation	Microprocessor controlled
Power Supply	
Battery Type	Gel SLA
Battery Capacity (Ah)	55
Nominal Voltage (V)	12
Physical Characteristics	
Body Material	Rotationally-moulded UV-stabilised virgin polyethylene
Lens Material	UV-stabilised acrylic
Lens Diameter (mm/inches)	From 171 / 6 3/4
Lens Design	Multi LED Optic
Mounting	4 x 11mm mounting holes
Height (mm/inches)	From 675 / 26 1/2
Width (mm/inches)	560 / 22
Mass (kg/lbs)	From 23 / 50.7
Product LifeExpectancy	Up to 12 years
Certifications	
CE	EN61000-6-3:1997. EN61000-6-1:1997
IALA	Signal colours compliant to IALA E-200-1
Quality Assurance	ISO9001:2015
Waterproof	IP68 light-head
Intellectual Property	
Trademarks	SEALITE® is a registered trademark of Sealite Pty Ltd
Warranty*	
3-year warranty	
Options Available	
<ul style="list-style-type: none"> SL-125 Series Lantern 200mm bolt pattern mounting plate GPS Synchronisation AIS Remote Monitoring GSM Monitoring & Control System RS232/422/485 Port General purpose inputs (2) & outputs (2) 	

Technical Illustration

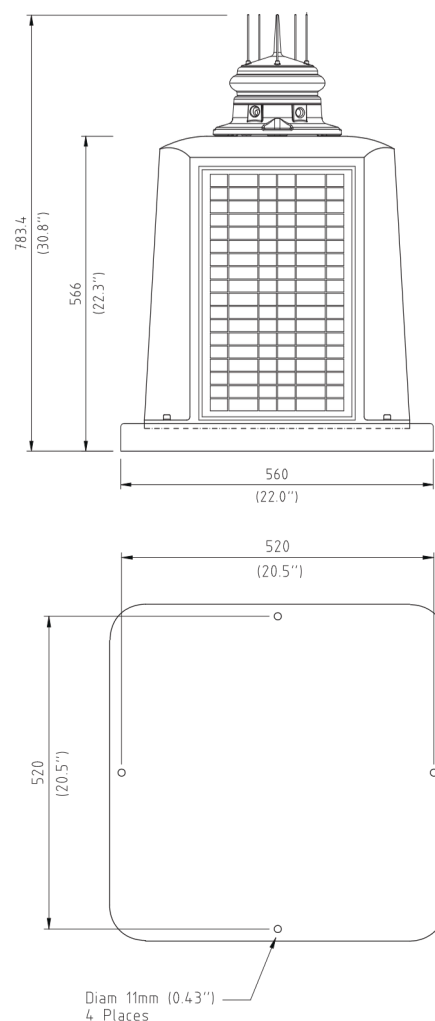

We believe technology improves navigation™

